


DEWALT®

ENGINEERED BY **POWERS™**

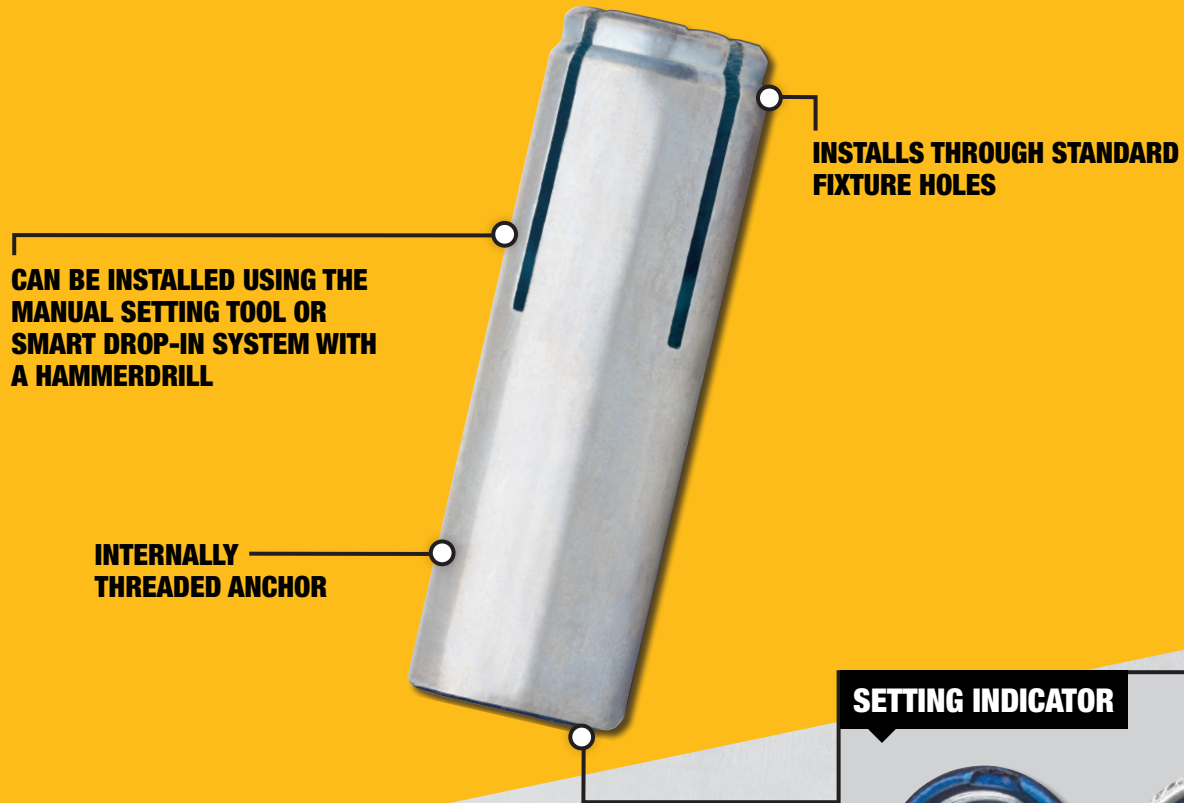

CAN BE INSTALLED USING THE
MANUAL SETTING TOOL OR
SMART DROP-IN SYSTEM WITH
A HAMMERDRILL

INSTALLS THROUGH STANDARD
FIXTURE HOLES

INTERNALLY
THREADED ANCHOR

SETTING INDICATOR



Before Setting



Properly Set

**UNIQUE CROWN DESIGN CONFIRMS
ANCHOR HAS BEEN PROPERLY SET WITH
THE SETTING SYSTEM**

APPROVALS



Full FM & UL listings:
www.DEWALT.com

BASE MATERIALS



Normal
Weight
Concrete

TYPICAL APPLICATIONS

- › Suspending conduit
- › Fire sprinkler
- › Cable trays and strut
- › Concrete formwork
- › Pipe supports
- › Suspended lighting

INTERNALLY THREADED EXPANSION ANCHOR

Smart DI™ System

SMART DROP-IN

CAT #	ANCHOR SIZE	CTN	MSTR
6304SD	1/4"	100	1000
6306SD	3/8"	50	500
6308SD	1/2"	50	300

DROP-IN TOOL

CAT #	SIZE	CTN	MSTR
00425SD	1/4"	1	6
00427SD	3/8"	1	6
00429SD	1/2"	1	6

DRILL

CAT #	SIZE	CTN	MSTR
00391SD	3/8" (for 1/4" Smart DI)	1	12
00397SD	1/2" (for 3/8" Smart DI)	1	12
00410SD	5/8" (for 1/2" Smart DI)	1	12

REPLACEMENT PARTS

CAT #	FITS TOOL	KIT CONTENTS
00426SD	00425SD	Rubber Spring Plug, 2 Guide Screws
00428SD	00427SD	Rubber Spring Plug, 2 Guide Screws
00430SD	00430SD	Rubber Spring Plug, 2 Guide Screws



RELATED PRODUCTS



DCH293R2DH
20V MAX* XR® SDS PLUS
ROTARY HAMMER W/DUST
COLLECTION



DCH273P2DH0
20V MAX* XR® SDS PLUS ROTARY
HAMMER W/ON-BOARD DUST
EXTRACTOR



HOLLOW DRILL BIT
SDS PLUS AND
SDS MAX CARBIDE



DWV012
10-GALLON HEPA/RRP
WET/DRY DUST EXTRACTOR

For 20V MAX Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

1-800-4-DEWALT

www.DEWALT.com

Copyright ©2019 DEWALT. The following are trademarks for one or more DEWALT power tools, accessories, anchors and concrete adhesives: The yellow and black color scheme; the "D"-shaped air intake grill; the array of pyramids on the handgrip; the kit box configuration; and the array of lozenge-shaped humps on the surface of the tool.

ICDWSMRTDISS