

GCS (Above Mount)




Versatile pipe clamp solution designed for use with standard strut channel profiles to secure up to 6" OD piping systems in multiple mechanical and plumbing applications.

FEATURES / BENEFITS

- Quick** – simple and secure attachment to channel with a 3/16" hex key
- Universal** – secures up to 6" OD piping systems, eliminating the need to stock multiple pipe clamps
- Versatile** – suitable for mechanical piping and plumbing applications including HVAC refrigerant piping, VRF systems, medical gas, and domestic water
- Strong** – can be used to rack piping (refer to strut manufacturer for point loads)
- Robust** – secure fit to strut using the hex key allows safe transit of pre-built racks from off-site pre-fabrication shop to the job site
- Safe** – stainless steel securing strap with non-conductive coating to prevent galvanic corrosion between dissimilar metals
- Adjustable** – prior to final lock, button release allows easy adjustment or addition of insulation after installation




INSTALLATION & ADJUSTMENT

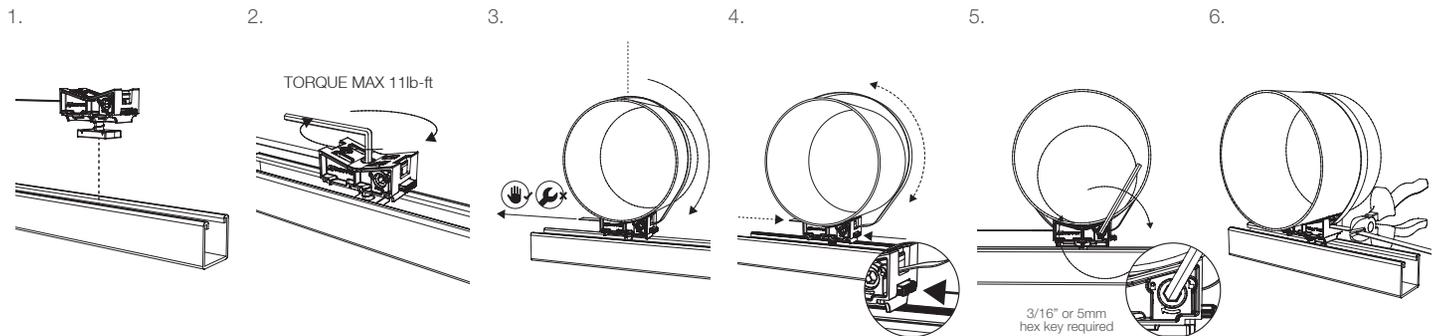

Always support load before adjusting.

SPECIFICATION

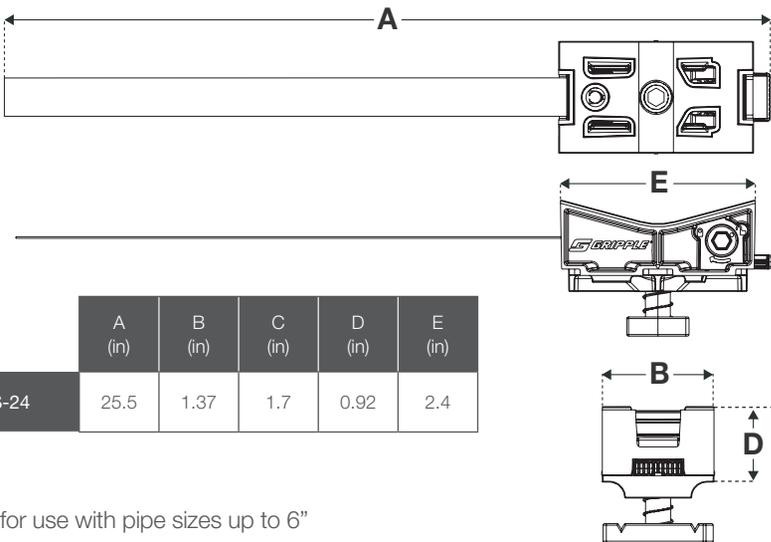

Suitable for use with pipe sizes up to 6"

SUBMITTAL INFORMATION

Load Rating:

Above-Mount (Racked) - Refer to strut channel manufacturer

Material:

- Housing** – ZA2 Zinc
- Cover** – 30% glass filled PP
- Rubber Pad** – EDPM
- Wedge** – Sintered steel hardened to min 50 Rockwell C
- Spring Release Cartridge**: Acetal
- Locking Screw**: Type ZA2 zinc
- Strap**: Stainless steel with non-conductive coating

Approvals:

- UL listed UL2239** – Hardware for the support of conduit, tubing & cable – project file E251132
- UL listed UL2043** – Plenum rating
- ICC - PMG-1320** Pipe Support & Hanging System
- IAPMO - UEL 5030** – Pipe, duct & conduit supports & suspension hangers

