




Spiral Buckle



This zinc plated 14 gauge buckle is designed to suspend round and oval ductwork from ceiling joists or beams with the use of threaded rod up to 3/8" in diameter. Simply place 1" hanging strap in one side of the buckle then around the material and into the other side of the buckle. When the strap is correctly inserted through the slots, the strap is locked into the buckle by the weight of the duct.

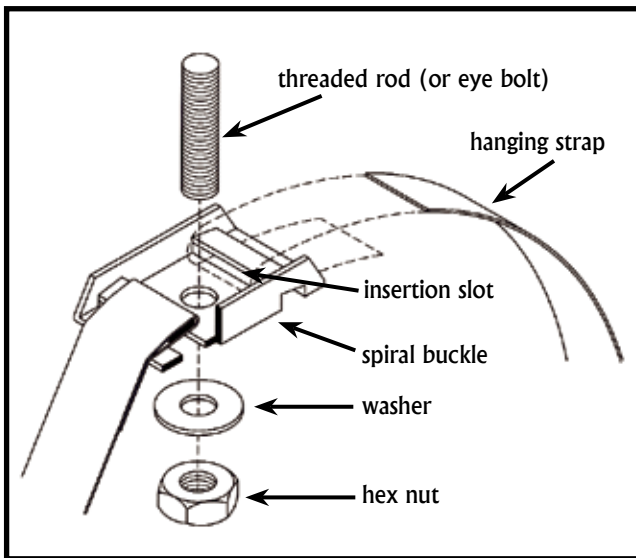

Spiral Buckle with threaded rod



Spiral Buckle with eye bolt and the Dyna-Tite Wire Rope Suspension System

Ordering Information

Item #	Code	Description	Packaged
30340	DSB1	Dyna-Tite Spiral Buckle	Packed 50/box

Duro Dyne East Division, Bay Shore, NY 631-249-9000 Fax: 631-249-8346
Duro Dyne Midwest Division, Fairfield, OH 513-870-6000 Fax: 513-870-6005
Duro Dyne West Division, Santa Fe Springs, CA 562-926-1774 Fax: 562-926-5778
Duro Dyne Canada, Lachine, Quebec, Canada 514-422-9760 Fax: 514-636-0328
www.durodyne.com E-mail: durodyne@durodyne.com



© Duro Dyne Corp.
Printed in USA 9/09